

The influence of some second-order effects on the behaviour of rigid plastic shells at the yield point load

M. K. DUSZEK (WARSZAWA) and F. ALESSANDRINI (UDINE)

THE PAPER deals with the problem of stability of rigid-perfectly plastic shells at the yield point load. The material incompressibility, observed when plastic deformations take place, is taken into account and the results are compared with the known solution obtained when the thickness of the shell is assumed to be constant. The influence of different definitions of a perfectly plastic material on the post yield behaviour of the shells is also considered. The question is illustrated by the examples of cylindrical shells subject to axial end forces and uniformly distributed lateral dead load.

W pracy rozważany jest problem stateczności sztywno-idealnie plastycznych powłok w chwili osiągnięcia przez obciążenie wartości obciążenia uplastyczniającego. W obliczeniach uwzględniono zmiany grubości powłoki wyznaczone na podstawie warunku nieściśliwości, a wyniki porównano ze znanym rozwiązaniem otrzymanym przy założeniu stałej grubości. Wykazano, że wpływ różnych definicji materiału idealnie plastycznego może być istotny przy rozważaniu po-granicznego zachowania się powłoki. Otrzymane rozwiązanie zilustrowano przykładami powłok cylindrycznych poddanych osiowym siłom przyłożonym na końcach oraz równomiernie rozłożonemu obciążeniu nominalnemu.

В работе рассматривается проблема устойчивости жестко-идеально пластических оболочек в момент достижения нагрузкой значения пластической нагрузки. В расчетах учтены изменения толщины оболочки, определенные на основе условия несжимаемости, а результаты сравнены с известным решением, полученным при предположении постоянной толщины. Показано, что влияние разных определений идеального пластического материала может быть существенным при рассмотрении предельного поведения оболочки. Полученное решение иллюстрировано примерами цилиндрических оболочек, подвергнутых осевым силам приложенным на концах, а также равномерно распределенной нормальной нагрузке.

1. Introduction

IT IS RATHER obvious that the problem of stability and post yield behaviour of a structure can be treated properly only within the framework of the geometrically nonlinear theory, yet the question arises whether the second-order effects, usually neglected when formulating constitutive relations, play also a substantial role.

Therefore such effects as the influence of various definitions of a perfectly plastic material (associated with the different objective stress rates) on the post yield behaviour of the shells is considered in the paper. The material incompressibility, observed when plastic deformations take place, is also taken into account when formulating geometrical relations. The results are compared with the known solutions obtained under the assumption of constant shell thickness.

The problem considered is illustrated by examples of cylindrical shells subject to the end axial forces and uniformly distributed lateral dead load.

2. Material stability and the definition of a perfectly plastic material

In the recent literature the following two approaches to the definition of the material stability of time-independent materials are most commonly used.

The first one is concerned with DRUCKER's concept [1]. The material stability condition is then derived from the energy criterion of stability of a body or a system when homogeneous stress and strain states are assumed.

The other approach consists in generalization of the definition of material stability under one-dimensional tension to cover an arbitrary stress state. According to this definition, the material is said to be stable when the stress-strain curve is rising and is said to be unstable when the curve is falling. This idea can be generalized for the three-dimensional stress state and expressed analytically as a requirement that the scalar product of conjugate stress rate and strain rate tensors be nonnegative for a stable material

$$(2.1) \quad \nabla^{ij} d_{ij} \geq 0,$$

where ∇^{ij} denotes an objective time derivative of the Cauchy (true) stress tensor and d_{ij} is the symmetric part of the velocity gradient.

This definition does not, however, describe the material properties in a unique way since the material stability depends here upon the choice of the objective stress rate measure.

In the literature, the Jaumann stress derivative (denoted here by ∇_J^{ij}) is usually chosen to be used in the constitutive relations. The Jaumann stress rate is associated with axes rotating with a material element but not deforming with it. The relation (2.1) can then be rewritten in the form

$$(2.2) \quad \nabla_J^{ij} d_{ij} \geq 0$$

and is called the material stability condition in the Jaumann sense [2]. Using, however, the Oldroyd stress derivative ∇_0^{ij} (associated with the axes rotating and deforming with the material element) the relation (2.1) takes the form

$$(2.3) \quad \nabla_0^{ij} d_{ij} \geq 0$$

and is called the material stability condition in the Oldroyd sense [2].

Making use of the known relation between the Jaumann and the Oldroyd stress derivatives

$$(2.4) \quad \nabla_J^{ij} = \nabla_0^{ij} + \sigma^{ik} d_k^j + \sigma^{kj} d_k^i$$

the material stability condition (2.2) can be transformed to become

$$(2.5) \quad \nabla_0^{ij} d_{ij} + 2\sigma^{ij} v_{,i}^n v_{n,j} \geq 0.$$

The theory of finite deformation of plastic shells is usually formulated in the total Lagrangian description. Then the constitutive relations are required to be established using variables of this description, that is the Kirchhoff stress tensor S^{KL} and the Green strain

tensor E_{KL} . It may be shown that for the incompressible material the following relation takes place [2]:

$$(2.6) \quad \overset{\nabla_0}{\sigma}{}^{ij} d_{ij} = \dot{S}^{KL} \dot{E}_{KL},$$

where the dot denotes the material time derivative.

Substituting Eq. (2.6) into Eq. (2.3), we obtain the material stability condition in the Oldroyd sense in the form

$$(2.7) \quad \dot{S}^{KL} \dot{E}_{KL} \geq 0.$$

Similarly, in view of the relation

$$(2.8) \quad \overset{\nabla_J}{\sigma}{}^{ij} d_{ij} = \dot{S}^{KL} \dot{E}_{KL} + 2S^{KL} \dot{E}_{KM} \dot{E}_L^M,$$

the material stability condition in the Jaumann sense may be written as

$$(2.9) \quad \dot{S}^{KL} \dot{E}_{KL} + 2S^{KL} \dot{E}_{KM} \dot{E}_L^M \geq 0.$$

Since the perfectly plastic material is defined as a plastic solid for which the neutral material stability condition is satisfied, in view of the above considerations the following definitions of the perfectly plastic material can be introduced.

We say that a material is perfectly plastic in the Jaumann sense if

$$(2.10) \quad \overset{\nabla_J}{\sigma}{}^{ij} d_{ij} = 0$$

or in view of (2.8) if

$$(2.11) \quad \dot{S}^{KL} \dot{E}_{KL} + 2S^{KL} \dot{E}_{KM} \dot{E}_L^M = 0.$$

Similarly, we say that a material is perfectly plastic in the Oldroyd sense if

$$(2.12) \quad \overset{\nabla_0}{\sigma}{}^{ij} d_{ij} = 0$$

or in view of Eq. (2.6) if

$$(2.13) \quad \dot{S}^{KL} \dot{E}_{KL} = 0$$

if the Lagrangian description is applied.

3. Geometrical stability

A question of geometrical stability depends on the material stability, boundary conditions and the geometry of the body.

The geometrical instability arises when the instability associated with changes in geometry is great enough to overcome the stability of the material.

The criterion for geometrical stability may be formulated in terms of the dead load intensity rate [3]; so let us consider a structure subject to a system of dead loads \mathbf{P} of monotonically increasing intensity:

$$(3.1) \quad \mathbf{P}(\mathbf{X}, t) = \mu(t) \overset{\circ}{\mathbf{P}}(\mathbf{X}),$$

where $\mu(t)$ indicates the load intensity and $\overset{\circ}{\mathbf{P}}(\mathbf{X})$ specifies the load distribution.

The rate of loading is therefore

$$(3.2) \quad \dot{\mathbf{P}}(\mathbf{X}, t) = \dot{\mu}(t) \dot{\mathbf{P}}(\mathbf{X}).$$

Geometrical stability is associated with $\dot{\mu} > 0$, and this means that a quasi-static motion of a structure takes place only for increasing dead loads; if $\dot{\mu} < 0$, the structure is said to be geometrically unstable and it means that a structure continues to deform plastically also if decreasing dead loads are applied.

Making use of the Principle of Virtual Energy and the nonlinear strain-displacement relations, the following expression can be derived:

$$(3.3) \quad \int_S \dot{\mathbf{P}}^K \dot{U}_K dS = \int_V (\dot{S}^{KL} \dot{E}_{KL} + S^{KL} \dot{U}_{M|K} \dot{U}_{|L}^M) dV,$$

where \mathbf{U} is a displacement vector; the vertical stroke denotes covariant differentiation; S and V are the surface and the volume of the body respectively, in the original configuration.

Substituting Eq. (3.2) into Eq. (3.3), the rate of load intensity may be determined from the formula

$$(3.4) \quad \dot{\mu}(t) = \frac{\int_V (\dot{S}^{KL} \dot{E}_{KL} + S^{KL} \dot{U}_{M|K} \dot{U}_{|L}^M) dV}{\int_S \dot{\mathbf{P}}^K \dot{U}_K dS}.$$

For positive $\mu(t)$ the following inequality is always satisfied:

$$(3.5) \quad \int_S \dot{\mathbf{P}}^K \dot{U}_K dS \geq 0.$$

From Eq. (3.4) and (3.5) it follows that $\dot{\mu} > 0$ if

$$(3.6) \quad \int_V (\dot{S}^{KL} \dot{E}_{KL} + S^{KL} \dot{U}_{M|K} \dot{U}_{|L}^M) dV > 0.$$

Therefore the relation (3.6) can be considered as the geometrical stability condition.

For a rigid-perfectly plastic material in the Oldroyd sense, in view of Eq. (2.13) the geometrical stability criterion (3.6) reduces to

$$(3.7) \quad \int_V S^{KL} \dot{U}_{M|K} \dot{U}_{|L}^M dV > 0,$$

whereas for a rigid-perfectly plastic material in the Jaumann sense, in view of Eq. (2.11), it becomes [4]

$$(3.8) \quad - \int_V S^{KL} \dot{U}_{K|M} \dot{U}_{|L}^M dV > 0.$$

4. Application of the geometrical stability conditions to cylindrical shells

Let us consider a thin-walled, cylindrical shell subject to rotationally symmetric deformation under the action of a uniformly distributed dead load \mathbf{P} and the axial end load \mathbf{T} , Fig. 1.

Assuming that the components of the displacement vector U^K are analytic functions of the coordinate Z normal to the shell middle surface, they can be expanded into a power series:

$$(4.1) \quad \begin{aligned} U^Z &= W(X) + Z\gamma^Z(X) + \dots, \\ U^X &= V(X) + Z\gamma^X(X) + \dots, \\ U^\theta &= U(X) + Z\gamma^\theta(X) + \dots \end{aligned}$$

In view of the assumption that the considered shells are thin, the nonlinear terms with respect to Z can be neglected.

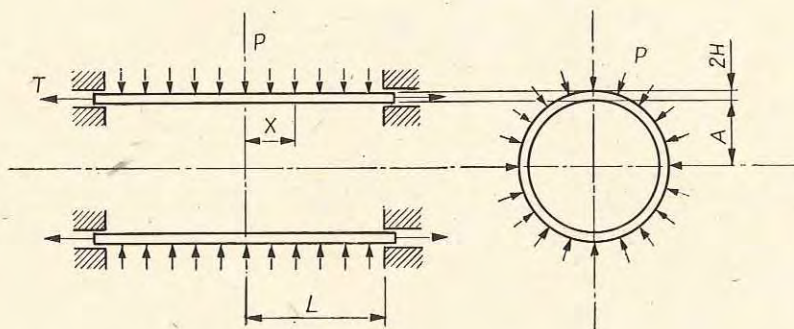


FIG. 1.

From the assumption of rotationally symmetric deformation it follows that the circumferential component U^θ of the displacement vector is equal to zero.

Next we assume that the transverse shearing is negligibly small and that no volume changes take place during plastic deformations. These assumptions allow us to express the functions U^Z and U^X in terms of W and V .

Finally the displacement field is found to have the form

$$(4.2) \quad \begin{aligned} U^Z &= W - Z \left(V_{,x} + \frac{W}{A} \right), \\ U^X &= V - ZW_{,x}, \\ U^\theta &= 0. \end{aligned}$$

This means that the straight normals to the middle surface remain straight but the normality is satisfied only for $Z = 0$; moreover, their length (thickness of shells) can change during the deformation process.

The above kinematic assumptions are less restrictive than the assumptions of the classical Kirchhoff-Love theory of shells which say that the straight normals remain straight and normal and do not change their length. The displacement field has then the form

$$(4.3) \quad \begin{aligned} U^Z &= W, \\ U^X &= V - ZW_{,x}, \\ U^\theta &= 0. \end{aligned}$$

Making use of Eqs. (2.13) and (4.2) in Eq. (3.4) the expression defining the rate of load intensity for a perfectly plastic material in the Oldroyd sense may now be written as

$$(4.4) \quad \dot{\mu} = \frac{\int_S \left\{ n_\theta \dot{w}^2 + n_x \left[\left(\frac{A^2}{L^2} \right) \dot{w}_{,x}^2 + \dot{v}_{,x}^2 \right] - \frac{1}{\alpha} \left[m_x (\dot{w}_{,x}^2 + \dot{v}_{,xx} \dot{w}_{,x} + \dot{v}_{,x} \dot{w}_{,xx}) + \right. \right.}{\int_S (p \dot{w} + t \dot{v}_{|x=1}) dS} \left. \left. + m_{x,x} (2 \dot{w}_{,x} \dot{v}_{,x} + \dot{w}_{,x} \dot{w}) \right] \right\} dS}{\int_S (p \dot{w} + t \dot{v}_{|x=1}) dS}$$

where the dimensionless quantities are defined as follows:

$$(4.5) \quad w = \frac{W}{A}, \quad v = \frac{V}{L}, \quad x = \frac{X}{L}, \quad \alpha = \frac{L^2}{AH},$$

$$(4.6) \quad n_x = \frac{1}{2\sigma_0 H} \int_{-H}^{+H} S_x^x dZ, \quad n_\theta = \frac{1}{2\sigma_0 H} \int_{-H}^{+H} S_\theta^\theta dZ, \quad m_x = \frac{1}{\sigma_0 H^2} \int_{-H}^{+H} S_x^x Z dZ,$$

$$(4.7) \quad p = \frac{PA}{2\sigma_0 H}, \quad t = \frac{T}{4\pi\sigma_0 AH}.$$

Assuming the "limited interaction" yield condition, the limit solution for the cylindrical shell with the boundary conditions considered in the paper was obtained by P. G. HODGE [5].

The curve $ABCDEF$ in Fig. 2 shows the yield-point loading curve for the particular case of $\alpha = \infty$ and the curve $A'B'C'D'E'F'$ for $\alpha = 2$.

The yield-point loading curves for $2 < \alpha < \infty$ have a similar shape and are placed between the curves for $\alpha = 2$ and $\alpha = \infty$. In Fig. 2 are marked also the curves for $\alpha = 3$ and $\alpha = 5$.

Now, making use of the stress and velocity fields given by the limit load solution, we shall supplement this solution by informing about stability and the slope of the load-deflection curve at the yield-point load.

For the range of loads represented by the line CD or $C'D'$ in Fig. 2, the limit load solution [5] gives

$$(4.8) \quad \begin{aligned} 0 \leq t < 1, \quad p &= 1 - t + \frac{2}{\alpha}, \\ m_x &= 1 - 2x^2, \quad n_\theta = -1 + t, \quad n_x = t, \\ w &= \dot{w}_0(1-x), \quad \dot{v} = \dot{w}_0 \left(x - \frac{x^2}{2} \right); \end{aligned}$$

in this case the expression (4.4) becomes

$$(4.9) \quad \mu = \frac{\frac{2}{3} \alpha \dot{w}_0 \left(3t \frac{A^2}{L^2} + 2t - 1 - \frac{5}{\alpha} \right)}{\alpha + 2}.$$

Hence

$$(4.10) \quad \dot{\mu} > 0 \quad \text{for} \quad t > \frac{\alpha+5}{3\frac{A}{H}+2\alpha} \quad \text{shell is stable,}$$

$$(4.11) \quad \dot{\mu} < 0 \quad \text{for} \quad t < \frac{\alpha+5}{3\frac{A}{H}+2\alpha} \quad \text{shell is unstable.}$$

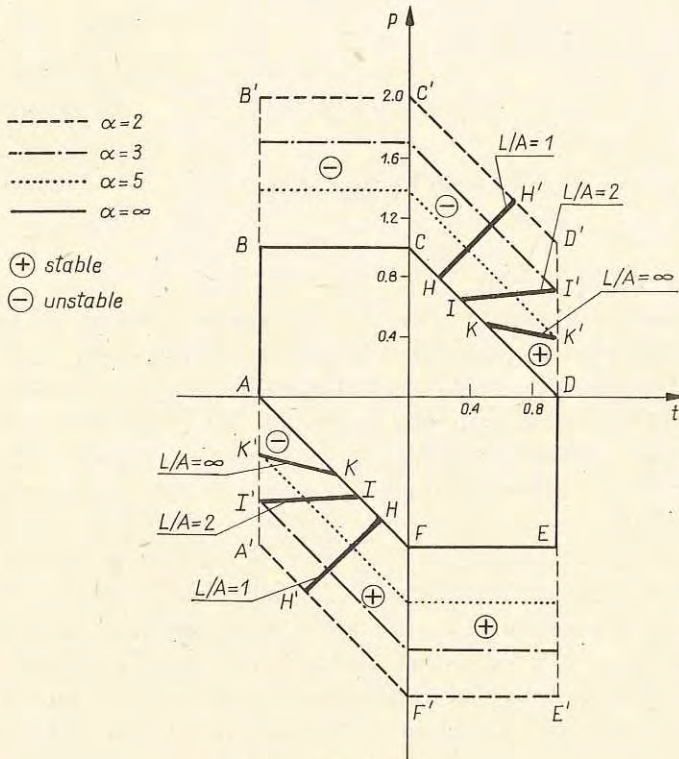


FIG. 2.

For the range of loads represented by the line BC or B'C' in Fig. 2 the limit load solution [5] gives

$$(4.12) \quad \begin{aligned} -1 < t < 0, \quad p &= 1 + \frac{2}{\alpha}, \\ m_x &= 1 - 2x^2, \quad n_\theta = -1, \quad n_x = t, \\ \dot{w} &= \dot{w}_0(1-x), \quad \dot{v} = 0. \end{aligned}$$

The rate of load intensity (4.4) reduces to the form

$$(4.13) \quad \dot{\mu} = \frac{2\alpha\dot{w}_0 \left(3t\frac{A^2}{L^2} - 1 - \frac{3}{\alpha} \right)}{3(\alpha+2)}.$$

$$\dot{\mu} = \frac{\int_S \left[-n_x \left(\dot{v}_{,x}^2 - \frac{A^2}{L^2} w_{,x}^2 \right) - \frac{1}{2\alpha} m_x (\dot{w}_{,x} \dot{v}_{,xx} + \dot{w}_{,x}^2 - 2\dot{v}_{,x} \dot{w}_{,xx}) - n_\theta \dot{w}^2 + \frac{1}{\alpha} m_{x,x} \dot{w}_{,x} \dot{w} \right] dS}{\int_S (p\dot{w} + t\dot{v}|_{x=1}) dS} \quad (4.18)$$

Substituting the limit load solution (4.8) for $0 \leq t < 1$ into Eq. (4.18), we obtain

$$\dot{\mu} = \frac{2\dot{w}_0 \alpha \left(3t \frac{A^2}{L^2} - 2t + 1 - \frac{2}{\alpha} \right)}{3(\alpha + 2)} \quad (4.19)$$

Hence the shell is stable, $\dot{\mu} > 0$

$$\text{for } t < \frac{2-\alpha}{\alpha \left(3 \frac{A^2}{L^2} - 2 \right)} \quad \text{if } \frac{A^2}{L^2} < \frac{2}{3}$$

and for any t if $\frac{A^2}{L^2} > \frac{2}{3}$.

Whereas the shell is unstable, $\dot{\mu} < 0$

$$\text{for } t > \frac{2-\alpha}{\alpha \left(3 \frac{A^2}{L^2} - 2 \right)} \quad \text{if } \frac{A^2}{L^2} < \frac{2}{3}.$$

Similarly, substitution of Eq. (4.12) into Eq. (4.18) leads for $-1 < t < 0$ to

$$\dot{\mu} = \frac{2\dot{w}_0 \alpha \left(3t \frac{A^2}{L^2} + 1 + \frac{3}{2\alpha} \right)}{3(\alpha + 2)} \quad (4.20)$$

hence the shell is stable

$$\dot{\mu} > 0 \quad \text{for } t > \frac{-3-2\alpha}{6\alpha \frac{A^2}{L^2}} \quad (4.21)$$

and the shell is unstable

$$\dot{\mu} < 0 \quad \text{for } t < \frac{-3-2\alpha}{6\alpha \frac{A^2}{L^2}} \quad (4.22)$$

Finally, for $t = -1$, substitution of Eq. (4.15) into Eq. (4.18) furnishes

$$\dot{\mu} = \dot{v}_0 > 0 \quad (4.23)$$

what indicates that the shell is stable. Foregoing results, for the cylindrical shells made of an incompressible, perfectly plastic material in the Jaumann sense, are presented in Fig. 5 for $\alpha = 2 \div \infty$, $L/A = 1$ and in Fig. 6 for $\alpha = 2 \div \infty$, $L/A = 2$.

For the same definition of a perfectly plastic material (in the Jaumann sense) but for the displacement field (4.3) (at the Kirchhoff-Love assumption of the constant thickness), the stability problem at the yield point load has the following solution:

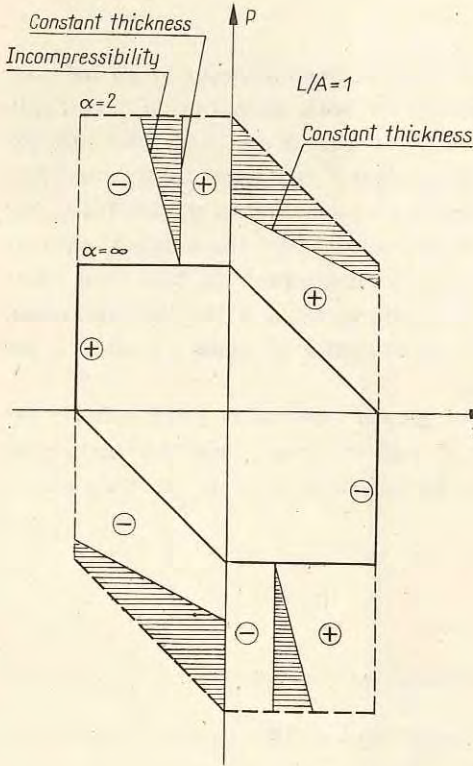


FIG. 5.

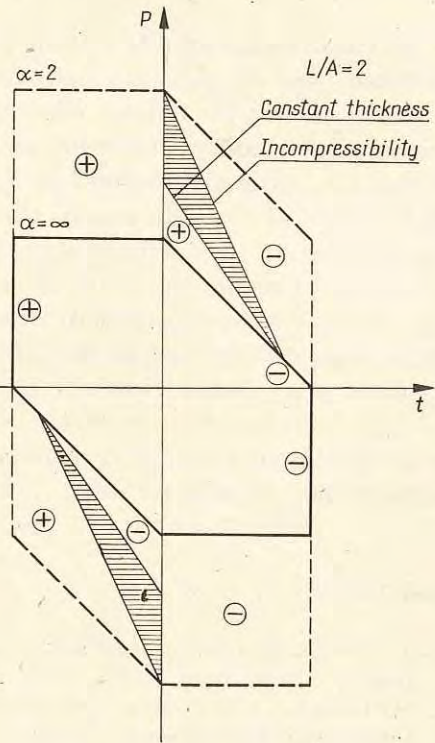


FIG. 6.

for $0 \leq t < 1$

$$(4.24) \quad \dot{\mu} = \frac{2\dot{w}_0 \alpha \left(3t \frac{A^2}{L^2} - 2t + 1 - \frac{5}{\alpha} \right)}{43(\alpha + 2)},$$

for $-1 < t < 0$

$$(4.25) \quad \dot{\mu} = \frac{2\dot{w}_0 \alpha \left(3t \frac{A^2}{L^2} + 1 \right)}{3(\alpha + 2)},$$

for $t = -1$

$$(4.26) \quad \dot{\mu} = \dot{v}_0.$$

Figures 5 and 6 illustrate these results for $\alpha = 2 \div \infty$ and $L/A = 1, 2$. The presented pictures illustrate two typical situations. For $L/A > 2$ the distribution of stable and unstable zones are similar to the case of $L/A = 2$. The lined zones marked in Figs. 5 and 6 indicate the ratio of p/t for which the answer whether the shell is stable or unstable changes when the incompressibility condition is taken into account in considerations.

5. Conclusions

Presented results indicate that the influence of material incompressibility on the post yield behaviour of cylindrical shells can be essential in both situations, if a perfectly plastic material in the Oldroyd sense or in the Jaumann sense is assumed. The different answer on the question of stability at the yield point load if incompressibility condition is taken into account, is obtained for the large zone in $t-p$ space when the shell is rather thick or short (α — small), whereas the both solutions coincide for the infinitely thin or long shell ($\alpha = \infty$). For perfectly plastic material in the Jaumann sense the post yield behaviour is more complex than in the case of perfectly plastic material in the Oldroyd sense. The influence of incompressibility depends both on the ratio of loads t/p and on the shape of the shell given by parameters L/A and α .

There is no evident proof which definition of plastic material is more suitable for description of the behaviour of shells made of mild steel, however available experimental data [7] are in agreement with solutions obtained for the shells made of perfectly plastic material in the Oldroyd sense.

References

1. D. C. DRUCKER, *A more fundamental approach to plastic stress-strain relations*, Proc. of the First Nat. Congress of App. Mech. ASME, 1951.
2. M. K. DUSZEK, *Problems of geometrically nonlinear theory of plasticity*, Mitteilungen aus dem Institut für Mechanik Ruhr-Universität Bochum, No 21, Juni 1980.
3. E. T. ONAT, *The influence of geometry changes on the load-deflection behaviour of plastic solids*, in: Plasticity, Ed. by L. S. SHU, P. S. SYMONDS, Pergamon Press 1961.
4. R. HILL, *Stability of rigid-plastic solids*, J. Mech. Phys. of Solids, 6, 1957.
5. P. G. HODGE, *Limit analysis of rotationally symmetric plates and shells*, Prentice-Hall, Inc., Englewood Cliffs, New Jersey 1963.
6. M. K. DUSZEK, *Stability analysis of rigid plastic structures at the yield-point load*, IUTAM Symposium, Ed. B. BUDIANSKY, Cambridge, USA, 1974.
7. G. AUGUSTI, S. d'AGOSTINO, *Test of cylindrical shells in the plastic range*, J. of Eng.-Mech. Division, 90, EM 1, 1964.

POLISH ACADEMY OF SCIENCES
INSTITUTE OF FUNDAMENTAL TECHNOLOGICAL RESEARCH
and
INSTITUTE OF THEORETICAL AND APPLIED MECHANICS
UNIVERSITY OF UDINE, ITALY.

Received January 13, 1983.